


Volans RGB (W) 24v (add suffix see below)

VOLANS RGB-W (240 LEDS)

PRODUCT DESCRIPTION

Versatile (SMT) Colour change RGB (W). Close pitch allows for 100mm cutting centres. Ideal for long runs. Fully dimmable stan-alone or DMX; many profiles suitable for all general lighting applications. Including wet areas.

For more information, please refer to [VOLANS RGB-W \(240 LEDS\) Datasheet](#)

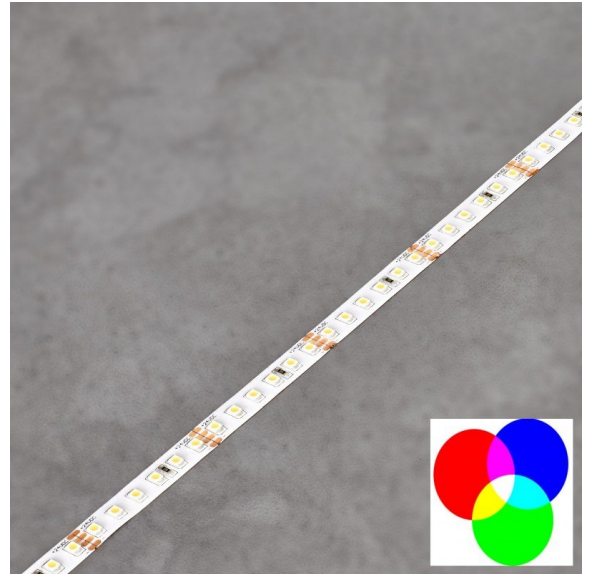

Construction	PVC / plastic mix; copper conductors 6oz
Colour (RAL finish)	Clear
Light source	15W/m LED (400 lms/colour/m) RGB 24v DC, 20W/m LED (450 lms/colour/m) RGB-W 24v DC
Colour temp.	CRI >85, RGB-W includes 3000k white (2700K to order)
Beam angle	n/a
Macadam	3
Controls	DMX, DALI
Cut out Dimension (mm)	n/a
Optional accessories	For available profiles and driver options, refer to data sheet

Special Notes Supplied with 1m attached 'power-lead'. Cutting and soldering service available. Supplied with 3m tape as standard.

VARIATIONS

Description	Colour (RAL finish)	Light source	Colour temp.	Beam angle	Controls
Clear		15W/m LED (400 lms/colour/m) RGB 24v DC	CRI >85	n/a	DMX
Clear		15W/m LED (400 lms/colour/m) RGB 24v DC	CRI >85	n/a	DALI
Clear		15W/m LED (400 lms/colour/m) RGB 24v DC	RGB-W includes 3000k white (2700K to order)	n/a	DMX
Clear		15W/m LED (400 lms/colour/m) RGB 24v DC	RGB-W includes 3000k white (2700K to order)	n/a	DALI
Clear		20W/m LED (450 lms/colour/m) RGB-W 24v DC	CRI >85	n/a	DMX
Clear		20W/m LED (450 lms/colour/m) RGB-W 24v DC	CRI >85	n/a	DALI
Clear		20W/m LED (450 lms/colour/m) RGB-W 24v DC	RGB-W includes 3000k white (2700K to order)	n/a	DMX
Clear		20W/m LED (450 lms/colour/m) RGB-W 24v DC	RGB-W includes 3000k white (2700K to order)	n/a	DALI

PRODUCT DESCRIPTION

Versatile (SMT) Colour change RGB (W). Close pitch allows for 100mm cutting centres. Ideal for long runs. Fully dimmable stan-alone or DMX; many profiles suitable for all general lighting applications. Including wet areas.

For more information, please refer to [VOLANS RGB-W \(240 LEDS\) Datasheet](#)

