

Canale-Trough

Product code DT. Canale (add suffix see below)

DESCRIPTION / Linear LED spotlight ceiling fixture, trimless

WHY USE THIS: Contemporary clean, seamless lines, bespoke lengths and configurations
Suitable for all display lighting with a variety of spotlight options.




IP20 zone 3 **CE** **LED** IEE : A+ EN 60598.

Dimensions (mm)

h150 x 332 x length; in 100mm increments, max length 2.0m


Cut-out (mm)

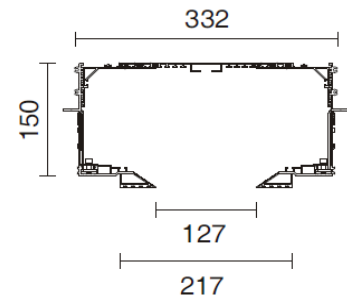


material light fixture	Aluminium
colours & finish/ (suffix)	Black -10, RAL - xxxx
light source & voltage options (PLEASE CONTACT US FOR ALTERNATIVE SOURCES)	a) MR16 9w LED 36 deg (590 lms) 12v b) 9w LED 40 deg (750lms) 200mA 45v c) d)
colour temperature /(suffix)	2700K / 3000K / 4000K; (TUNEABLE DIM TO WARM OPTION)
CRI (colour render) /(suffix)	83 / 90+
MacAdam	<3
Controls options /(suffix)	PHASE DIMMING DALI 0-10v
Optional Accessories	See p.2 for component list
AV. Weight (kg)	6 (p/mtr)
Emergency Available?	No
Special Notes	Remote drivers Plaster-in frame needed at first-fix can be mounted side or top

spotlights

technical performance

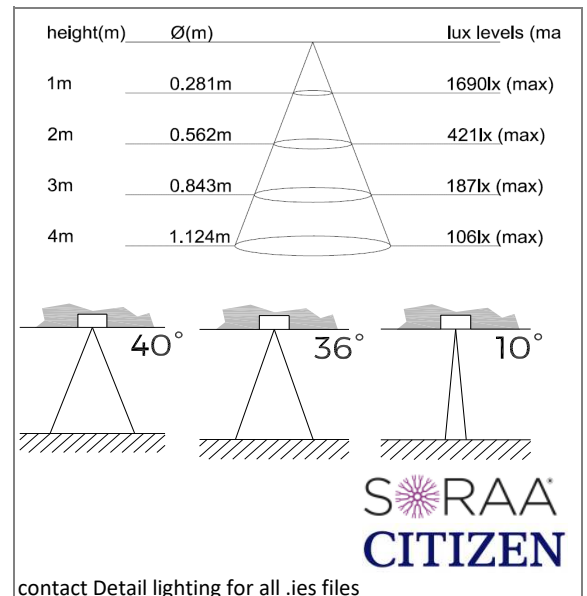

Components

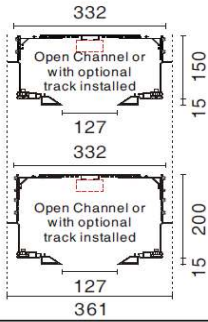

Channel

8130 H: 150 L: 500

8131 H: 150 L: 1000

8132 H: 150 L: 2000


Traverse set included.
In extruded aluminium.

8133 H: 200 L: 500

8134 H: 200 L: 1000

8135 H: 200 L: 2000

Traverse set included.
In extruded aluminium.



Traverse set



8101 L: 500

8102 L: 1000

8103 L: 2000

8104 L: 3000

In extruded aluminium.
Pair.

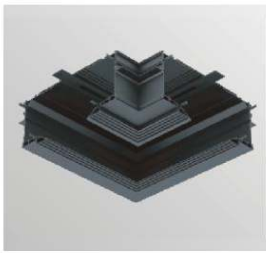


L Shape Joint

8110 H: 150

8115 H: 200


Traverse set included.
In extruded aluminium.



Ends set

8105 End cover

In extruded aluminium.
Pair.

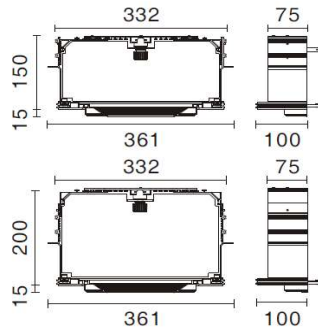


End cover plate

8136 H: 150


In extruded aluminium.
Pair.
Includes Art. 8105.

8137 H: 200

In extruded aluminium.
Pair.
Includes Art. 8105.

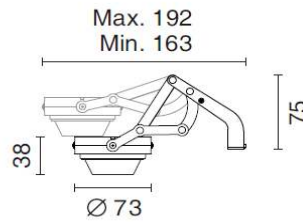

Article 8301 Side mounted. 600 - 800 Lumens

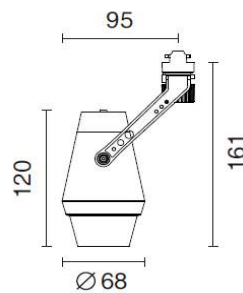

Article 8309 top mounted. 600 - 800 Lumens