TR3085

LED lensed track linear

Detail | lighting

Norms: EN 60598-1, EN 60598-2-1, EN 62471，EN 62493

Product information

Construction	Die-cast aluminium
General Product code：	TR3085 .....build code below
Mounting System:	Track mounted
Input Voltage (v):	220-240V (internal driver)
Driver	On/Off, Mains dimming DALI, 0-10v, Casambi .....select
Light source: luminaire	LED 40w (1050mA) CRI92 UGR9
Lm/W	109 Lm/W
SDCM	<3
Lifetime：	50.000h（L90B20）
Rotation Angle (degree):	n/a
Tilting Angle (degree):	40°
IP Rating:	20
Sustainable / maintenance	Replaceable Chip & driver
Temperature (°C) Material:	-20 ~+50
Fitting Colors:	9016 texture White / 9017 texture Black .....select
	RAL finishes to special order
N.W. lamp (Kg)：	2.0

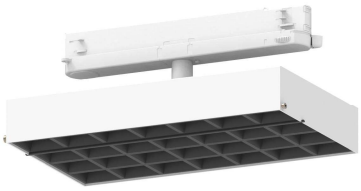

Beam °	40w
50°	4380 lm.

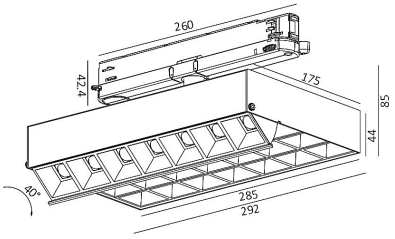

Code composition example： **TR3085 -D- 40 - 4K -50-B**

(A) (B) (C) (D) (E) (F)

A- Product		B- Dimming type	C- Wattage (w)	D – Colour temp. (k)	E – Beam angle °	F - Colour finish	G – Length mm	H – Accessory 2
TR3085		N = No dimming	40	3000k = 3K	50	W (white)	N/A	N/A
		D = DALI		4000k = 4K		B (black)		
		K = 0-10V		2000-6000K = TW		S (special)		
		Tunable = DT8						
		C = CASAMBI						

Repair WHY REPLACE?

- Repair key components
- Upgrade to latest spec. (all brands)
- Avoid embodied carbon
- Responsible recycling

WEEE: M0235AA

sales@detaillighting.co.uk