UNI Premium 0408 IP54 24v DC

LED COB

Detail | lighting

Norms: EN 60598-1, EN 60598-2-1, EN 62471，EN 62493

Product information **IP54** IEE : A+ CE

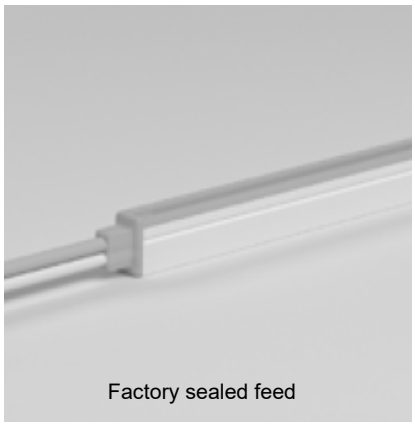

Construction:	**Copper / PVC**
Family Product code:	UNI0408 ... complete code builder below
Mounting / Track System:	Mounted in profile or clips (p.2)
Input Voltage (v):	24v
Driver:	On/Off, DALI, 0-10v, Casambi .....select
Light source: luminaire:	COB LED 480LEDs 6w
Lumens/W:	50 Lm/W
SDCM	3 CRI93
Lifetime ：	**54,000 L70 B10**
Rotation Angle (degree):	HORIZONTAL BENDING
Angle (degree):	130 °
IP Rating:	54
Sustainable / maintenance:	Replaceable driver
Temperature (°C) Material:	-20 ~+45
Fitting Colours:	Clear
Weight: (Kg):	0.1/m



Cutting centre 50mm

Beam °	**6w/m**
130°	300lm

Code composition example **: UNI0408- D- 6 - 27K -300-1m - FC**

(A) (B) (C) (D) (F) (G) (H)

A- Product		B- Dimming type	C- Wattage (w)	D – Colour temp. (k)	E – Beam angle °	F – Length mm	G – Supply lead length	H- Fixing method (.p.2)
UNI0408		N = No dimming	6w	2400K = 24K	N/A	(state length mm)	1m	Clips = FC
		D = DALI		2700k = 27K		(50mm increments)	2m	Profile = AP
		K = 0-10V		3000k = 3K			3m	
		C = CASAMBI		4000k = 4K				
		M = Mains						

Repair
WHY REPLACE?
- Repair key components
- Upgrade to latest spec. (all brands)
- Avoid embodied carbon
- Responsible recycling

WEEE: M0235AA

sales@detaillighting.co.uk

UNI Premium 0408 IP54 24v DC

LED COB

ACCESSORIES

Aluminum Profile
Article No.: AC021-AP
Dimension: 1000×6.5×7.2mm/
39.37"x0.26"x0.28"(LxWxH)
Material: aluminum
Color: silver

Mounting Clip
Article No.: AC022-SET
Dimension: 15×6.5×7.2mm/
0.59"x0.26"x0.28"(LxWxH)
Material: aluminum
Color: silver





DRIVER TABLE	
8w non dim	DT.APC-8-700
24w non dim	DT.EPV-24-24
40w non dim	DT.EPV-40-24
60w non dim	DT.EPV-60-24

15w MAINS DIM - 24V (LEADING & TRAILING EDGE)	DT.ELED-15-24T
30w MAINS DIM - 24V (LEADING & TRAILING EDGE)	DT.ELED-30P-24T
60W MAINS DIM - 24V (LEADING & TRAILING EDGE)	DT.ELED-60P-24T
100W MAINS DIM - 24V (LEADING & TRAILING EDGE)	DT.ELED-100P-24T
150W MAINS DIM - 24V (LEADING & TRAILING EDGE)	DT.ELED-150P-24T
200W MAINS DIM - 24V (LEADING & TRAILING EDGE)	DT.ELED-200P-24T
300W MAINS DIM - 24V (LEADING & TRAILING EDGE)	DT.ELED-300P-24T
360w MAINS DIM - 24V (LEADING & TRAILING EDGE)	DT.ELED-360P-24T

20w 0-10v DIM - 24V	DT.ELED-20-24V
45w 0-10v DIM - 24V	DT.ELED-45-24V
60W 0-10v DIM - 24V	DT.ELED-60-24V
100W 0-10v DIM - 24V	DT.ELED-100-24V
200W 0-10v DIM - 24V	DT.ELED-200-24V
300w 0-10v DIM - 24V	DT.ELED-300-24V

30w DALI drivers - 24v	DT.ELED-30-24DP2
60w DALI drivers - 24v	DT.ELED-60-24DP2
100w DALI drivers - 24v	DT.ELED-100-24DP2
200w DALI drivers - 24v	DT.ELED-200-24DP2
360w DALI drivers - 24v	DT.ELED-360-24DP2