

DL6169

LED joinery spotlight


Detail | lighting

Norms: EN 60598-1, EN 60598-2-1, EN 62471, EN 62493

Product information




Construction:	Die-cast aluminium
Family Product code:	DL6169 ... complete code builder below
Mounting / Track System:	Recessed
Input Voltage (v):	220-240V (remote driver 24v DC)
Driver:	Mains dim, DALI, 0-10v, Casambi select
Light source: luminaire:	COB 1w LED 24v DC
Lumens/W:	65 lm/W
SDCM	<3
Lifetime :	50.000h (L80-B10, Ta25°C)
Tilt Angle (degree):	90°
Rotation	350°
IP Rating:	20
Sustainable / maintenance:	Replaceable Reflector, Chip & driver
Temperature (°C) Material:	-20 ~+40
Fitting Colours:	9016 White / 9017 Matt black / RAL select
Weight: (Kg):	0.1

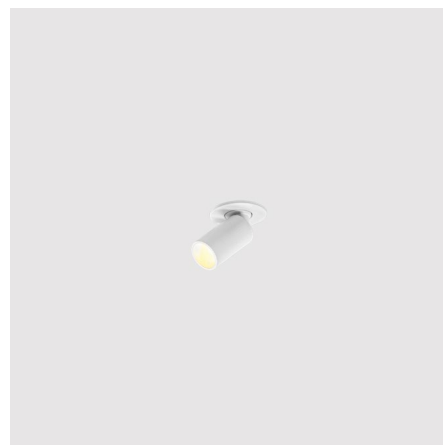

Supplied with Honeycomb insert



Beam zoom °	1w
15°	65 lm.
24°	65 lm
38°	65 lm

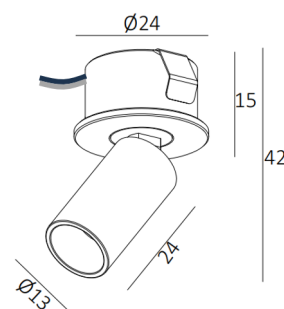

Cut-out 20mm

Code composition example : **DL6169 - T- 1 - 27K -24- B**

(A) (B) (C) (D) (E) (F)

A- Product	B- Dimming type	C- Wattage (w)	D - Colour temp. (k)	E - Beam angle °	F - Colour finish	G - Accessory 1	H - Accessory 2
DL6169	T = Triac (mains dim)	1	2400k = 24K	15	W (white)	N/A	N/A
	D = DALI		2700K = 27K	24	B (black)		
	K = 0-10V		3000k = 3K	38	S (special)		
	C = CASAMBI						



Repair
WHY REPLACE?

- Repair key components
- Upgrade to latest spec. (all brands)
- Avoid embodied carbon
- Responsible recycling



WEEE: M0235AA

sales@detaillighting.co.uk